

Fig. 1000 DZR Brass Metering Stations



FEATURES AND BENEFITS


- Precise and accurate measurement, conforming to BS 7350:1990
- Dezincification resistant material preventing corrosion cracking and fungal growth
- WRAS approved for use with potable water
- Supplied with red and blue test points for upstream and downstream port identification

MATERIAL SPECIFICATION

Component	Material	Specification BS EN
Metering Station	DZR Brass	12165 CW602N
Test Point	Fig. 631	



DIMENSIONAL DRAWINGS



DIMENSIONS AND WEIGHTS

Nom Size	mm in	15 1/2	22 3/4	28 1	32 1 1/4	40 1 1/2	50 2
A (threaded)	mm	57	58	66	72	72	82
B	mm	55	61	65	71	73	79
Weight	kg	0.29	0.30	0.40	0.50	0.54	0.77

PRESSURE/ TEMPERATURE RATING


Threaded Ends
PN20 Series B
15 bar at 120°C
20 bar from -10 to 100°C

TEST PRESSURES (HYDRAULIC)

Shell: 30 bar

SPECIFICATION

Kitemarked to BS 7350:1990.
WRAS Approved Product.
Supplied fitted with two figure 631 test points
Figure 1000 end connections threaded to
BS EN 10266 (ISO 7-1) formerly BS 21.
Taper female with the exception of the 1/2" inlet
which is parallel.

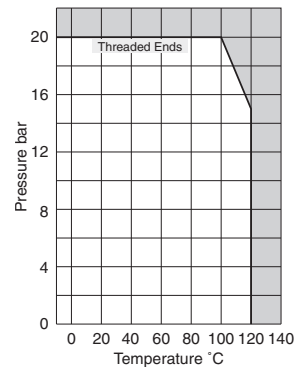

For Commissioning Valve Coefficients please refer to pages 47-49.

Every effort has been made to ensure that the information contained in this publication is accurate at the time of publishing. Hattersley Ltd assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.