

Fig. 28
Bronze - Lever operated

FEATURES AND BENEFITS


- Robust and high quality bronze body with integral seating surfaces
- Lever operated for ease of use
- Fitted with asbestos-free gland packing as standard



MATERIAL SPECIFICATION

Component	Material
Body	Bronze / Brass
Wedge	Brass
Lever	Brass
Washer	Brass
Plug	Brass
O-Ring	NBR
Gasket	Fibre

DIMENSIONAL DRAWINGS

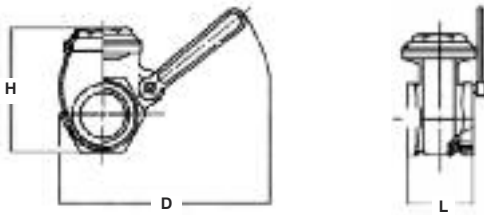

**PRESSURE/
TEMPERATURE RATING**


16 bar
-20°C to +90°C

SPECIFICATION

Screwed BSP
Lever Operated.
Bronze Body up to 1 1/2".
Brass Body 2" to 4".

DIMENSIONS AND WEIGHTS

Nom Size	DN in	15 1/2	20 3/4	25 1	32 1 1/4	40 1 1/2	50 2	65 2 1/2	80 3	100 4
L	mm	46	51	57	61	67	75	80	86	92
H	mm	57	66	76	88	96	115	150	170	210
D	mm	130	147	155	184	215	230	355	370	400
Weight	kg	0.39	0.56	0.78	1.10	1.42	1.62	2.85	3.80	5.80

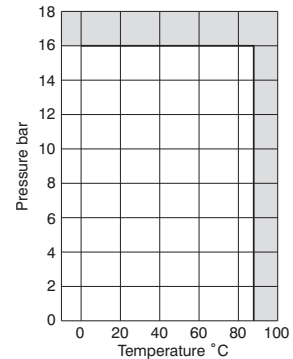

Every effort has been made to ensure that the information contained in this publication is accurate at the time of publishing. Hattersley Ltd assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.